

ATTENTION: DECK RESTORE™ is not a paint or stain and requires a specific application technique

SURFACE PREPARATION

Surface area must be clean and free of dirt, grease, mildew, and organic growth to ensure product bonding and adhesion. Sand or scrape any loose paint. Clean the surface using a brush with mild household cleaner and water. For tough stains, embedded dirt and grime a pressure washer may provide best results. If a pressure washer is used be sure surface is allowed to thoroughly dry before application. A pressure washer can force water deep into the surface and may cause moisture to impair adhesion. For grease / oil spots, use tri-sodium phosphate (TSP) according to manufacturer's directions. For mildew and other organic growth, use a dilution of household bleach (2 parts water to 1 part bleach and apply to surface prior to cleaning.

Raised nail heads, deck screws or loose deck boards should be secured.

Remove loose splinters and replace severely damaged or rotting boards.

IMPORTANT: DECK RESTORE™ is formulated to provide ideal adhesion to old, bare wood with proper surface preparation. Do not apply DECK RESTORE™ to any surface that has been recently coated with paint, stain, sealer or water repellent. New wood or freshly coated surfaces will not allow for proper adhesion.

For synthetic and composite decking material be sure to follow the specific manufacturer's recommendation for painting and / or staining. Synthetic or composite decking that is engineered with moisture repellents or sealers may prevent adhesion of DECK RESTORE™.

Avoid applying DECK RESTORE™ to any surface that is smooth or glossy. Smooth or glossy surfaces should be de-glossed before application.




STIR & POUR

Stir thoroughly and pour generous amount of DECK RESTORE™ into standard 9" roller tray. Working from a five gallon bucket with a roller grid is another option.



APPLY SECOND COAT

Repeat step 4. Allow final coat to dry at least 8 hours before foot traffic and 24 hours before replacing furniture or heavy objects. Drying time may vary due to weather conditions. DECK RESTORE™ cures to a hardened finish in approximately 3 weeks. Touch ups and partial re-coats are easy for repairs and blending to create and maintain the ideal finish.

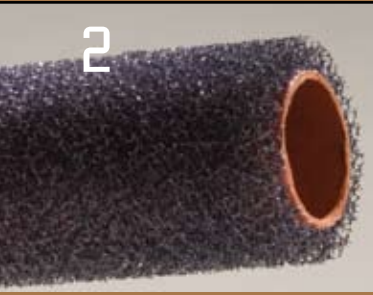

ABOUT RESTORE ROLLER™

Use the RESTORE ROLLER™ provided. The unique honey comb foam roller will absorb and evenly apply DECK RESTORE™ through the openings in webbing design when applying with light pressure.



OPTIONAL TECHNIQUES

A brush may be used to skim the rolled application in a back brushing motion in one direction. Use care not remove any material in place by applying too much pressure.



LOAD RESTORE ROLLER™

Saturate the RESTORE ROLLER™ in the coating by rolling back and forth in the tray. A fully loaded roller will cover a spread area of approximately 5-7 square feet. Apply generously and do not over-spread. Be careful not to re-roll into dried areas.



DIFFICULT AREAS & FINISHING TECHNIQUES

Difficult areas such as deck boards that are warped or cupped will require rolling across the narrow width of deck board as well as the length to ensure complete coverage. DECK RESTORE™ will fill nail holes and cracks up a 1/4". Fill these damaged areas with a heavily loaded roller or brush by dabbing these areas until the gaps or cracks are filled. Before rolling, cut in around edges with a brush and coat visible areas between deck boards. A brush may be ideal for small jobs or touch up and repair.



APPLY FIRST COAT

APPLY THE FIRST COAT by using slight pressure to disperse the coating evenly through the honey comb webbing. The two gallon kit will cover approximately 100 square feet for the first coat application.

Allow 3-6 hours for first coat to dry.



VERTICAL SURFACES & TRIM

DECK RESTORE™ is ideally suited for horizontal surfaces. If you are coating vertical surfaces such as deck posts, railings and balusters, you can color coordinate the DECK RESTORE™ color to RESTORE SOLID ACRYLIC STAIN™ available in all DECK RESTORE™ colors or color match to conventional paints or stains. See store for details.